


KARTATAPE_M 1562

Automatic taping machine with manual adjustment

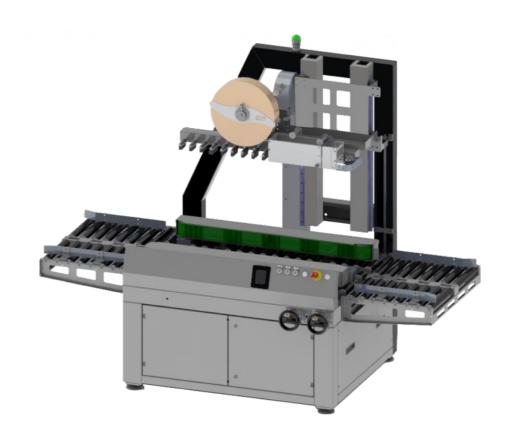

DESCRIPTION

TECHNICAL FEATURES


	Min	Max
Width	150 mm	600 mm
Height	150 mm	600 mm
Lunghezza	250 mm	∞ mm
Voltaggio	230V 1 Ph 50/60Hz	230V 1 Ph 50/60Hz

minipack®-torre S.p.A.



minipack®-torre shall not be held liable for typos or printing errors in this catalogue. It also reserves the right to make changes to the specified features without prior notice. All trademarks are property of their respective owners and are hereby acknowledged.

TECHNICAL DRAWING



TOP HIGHLIGHTS

- o Patented fast coil change kit with motorized lower arm opening standard
- o Energy saving, belt start only in the presence of the box standard
- o LED indicators on the dragging belts for machine status signaling standard
- o Patented and technologically advanced strapping unit

TECHNICAL FEATURES

- o Touch screen PLC
- o Coil change and strapping unit reset simple and intuitive
- o Adjustable speed at 3 levels, max belt advance, 30 m/minute
- O Average production from 0 to 9 packages per minute, with vegetable glue tape
- o Adjustment flyers with millimetric indicator located on the operator side
- o Belt height 75 mm
- o Usable belts: standard paper reinforced paper heavy reinforced paper

OPTIONAL

- o Electric plug-in model with built-in autonomous air system
- o 500 mm loading and unloading roller conveyor
- o Professional and adjustable self-braking wheels
- Lower paper break warning (recommended)
- o Lower coil end warning
- Possibility to use lower strapping only



 $^{\circ}\;$ Kartatape M 1562 bottom (box closure only below) available on request