

MVS41 X

TABLETOP VACUUM - SEALING BAR 626 MM FRONT / 310 MM SIDE



DESCRIPTION

The **MVS X chamber vacuum sealers** line is equipped with a range of technological content and high quality functions, while maintaining the utmost ease of use. Created through the collaboration with chefs and food industry professionals, these **vacuum packaging machines** have innovative features carved out of the needs of professional use, to meet all needs of the industry.

The tactile switch keypad is hermetically applied to the front part of the machine, so that it prevents the fluid from seeping into the card. The command panel allows you to access 10 different programs, tailored to the main needs of the industry.

Many other features make these **chamber vacuum sealers** real gems. From messages to warn of the need for oil change, to the presence of an electric sensor that reads the vacuum obtained in the chamber -interpreting the data directly from the card- up to the possibility of calibrating the **vacuum packaging machine** according to the altitude of use, in order to correct any variation in atmospheric

minipack®-torre S.p.A.

Sede legale - Via Provinciale, 54 - 24044 DALMINE (BG) Italy

P.IVA - C.F.: 01633550163 - Capitale sociale 619.200,00 i.v. - Reg. Imprese di Bergamo 01633550163 - REA n. 224151


pressure.

TECHNICAL FEATURES

Electrical power supply	120V 60Hz 1Ph
MAX power installed	2,3 kW
Maximum current	19A
Dimensions of the sealing bars	626 mm (no.1 front) + 310 mm (no. 2 side)
Packaging cycle (Vacuum 99,9%)	Vacuum= 22 s Air re-immission = 5 s
Vacuum pump	20 mc
Machine dimensions (lid open)	826x543x704 mm
Machine dimensions (lid closed)	826x543x445 mm
Machine weight (Net/Gross)	100/111 kg
Available chamber dimensions (Tank+lid)	637x289,5x101 mm

minipack®-torre shall not be held liable for typos or printing errors in this catalogue. It also reserves the right to make changes to the specified features without prior notice. All trademarks are property of their respective owners and are hereby acknowledged.

TECHNICAL DRAWING

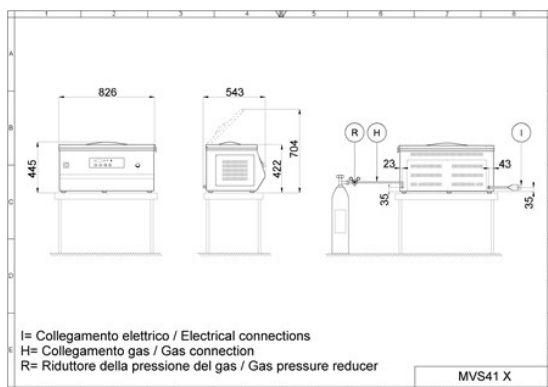

TECHNICAL FEATURES

minipack®-torre S.p.A.

Sede legale - Via Provinciale, 54 - 24044 DALMINE (BG) Italy

P.IVA - C.F.: 01633550163 - Capitale sociale 619.200,00 i.v. - Reg. Imprese di Bergamo 01633550163 - REA n. 224151

- Stainless steel (AISI 304)
- Vacuum cycle with stop
- Bag scrap cutting device
- Quick-coupling aluminium sealing bar
- Clear plastic lid suitable for use with food
- Volumetric vacuum sensor
- PE-HD filling tables
- 10 customisable programs
- Self-calibration
- Sealing bar overload safety device
- Oil and assistance warning light
- CE/ETL/NSF certification.