

MVS45L X

TROLLEY VACUUM - SEALING BAR 450 MM



DESCRIPTION

Maximum simplicity of setting and use, in front of the availability of many technological content and functions of high quality. These are the main features of **MVS X chamber vacuum sealers**, made with the help of professional chefs who have been able to enrich the equipment with new functions of the latest generation, cut out on the specific needs of professional operators.

These **vacuum packaging machines** allow to operate up to 10 different programs, customised to the main packaging requirements. The control panel with tactile controls is hermetically sealed on the front of the bodywork, so as to prevent any fluid filtration on the board.

Other features include:

- Special message that warns of the need for oil change
- Electronic sensor which, importing data directly from the card, is able to calculate the vacuum realized in the Chamber

minipack®-torre S.p.A.

Sede legale - Via Provinciale, 54 - 24044 DALMINE (BG) Italy

P.IVA - C.F.: 01633550163 - Capitale sociale 619.200,00 i.v. - Reg. Imprese di Bergamo 01633550163 - REA n. 224151

- Possibility of setting the machine to the vacuum on the atmospheric pressure conditions at the different altitudes

TECHNICAL FEATURES

| | MVS45L X Front Bar | MVS45L X 2 Side Bars |
|--|---------------------------------------|---------------------------------------|
| Electrical power supply | 120V 60Hz 1Ph 230V 50/60Hz 1Ph | 120V 60Hz 1Ph 230V 50/60Hz 1Ph |
| MAX power installed | 1,4 kW (120V) 1,1 kW (230V) | 1,4 kW (120V) 1,1 kW (230V) |
| Maximum current | 13 A (120V) 6 A (230V) | 13 A (120V) 6 A (230V) |
| Dimensions of sealing bars | 450 mm (no. 1 front) | 450 mm (no. 2 side bars) |
| Packaging cycle (Vacuum 20%) | Vacuum= 24 s Air re-immission= 8 s | Vacuum= 24 s Air re-immission= 8 s |
| Vacuum pump | 20 mc | 20 mc |
| Work surface height | 889 mm | 889 mm |
| Machine dimensions (lid open) | 546x676x1200 mm | 546x676x1200 mm |
| Machine dimensions (lid closed) | 546x676x1012 mm | 546x676x1012 mm |
| Machine weight (Net/Gross) | 104/129 kg | 104/129 kg |
| Available chamber dimensions (Tank+lid) | 466x405,5x226 mm | 351x466x226 mm |

minipack®-torre shall not be held liable for typos or printing errors in this catalogue. It also reserves the right to make changes to the specified features without prior notice. All trademarks are property of their respective owners and are hereby acknowledged.


TECHNICAL DRAWING



minipack®-torre S.p.A.

Sede legale - Via Provinciale, 54 - 24044 DALMINE (BG) Italy

P.IVA - C.F.: 01633550163 - Capitale sociale 619.200,00 i.v. - Reg. Imprese di Bergamo 01633550163 - REA n. 224151

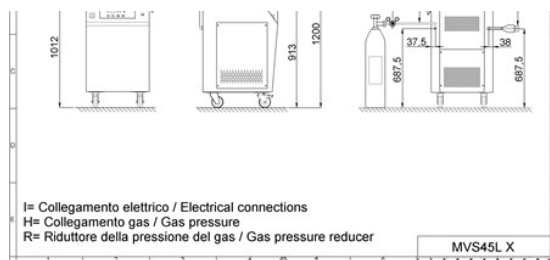

TECHNICAL FEATURES

- Stainless steel (AISI 304)
- Vacuum cycle with stop
- Bag scrap cutting device
- Quick-coupling aluminium sealing bar
- Clear plastic lid suitable for use with food
- Volumetric vacuum sensor
- PE-HD filling tables
- 10 customisable programs
- Self-calibration
- Sealing bar overload safety device
- Oil and assistance warning light
- CE/ETL/NSF certification.

VERSIONS

MVS 45L X FRONT B. (MVS 45L X front bar)

MVS 45L X 2 SIDE BARS (MVS 45L X 2 side bars)