


# PRATIKA 56 MPS X2

**AUTOMATIC PACKAGING MACHINE WITH CONTINUOUS SEALING COMPLETELY ELECTRIC AND SERVO-ASSISTED - SEALING BAR 400MM X ∞ - MAX PRODUCT HEIGHT 240MM**

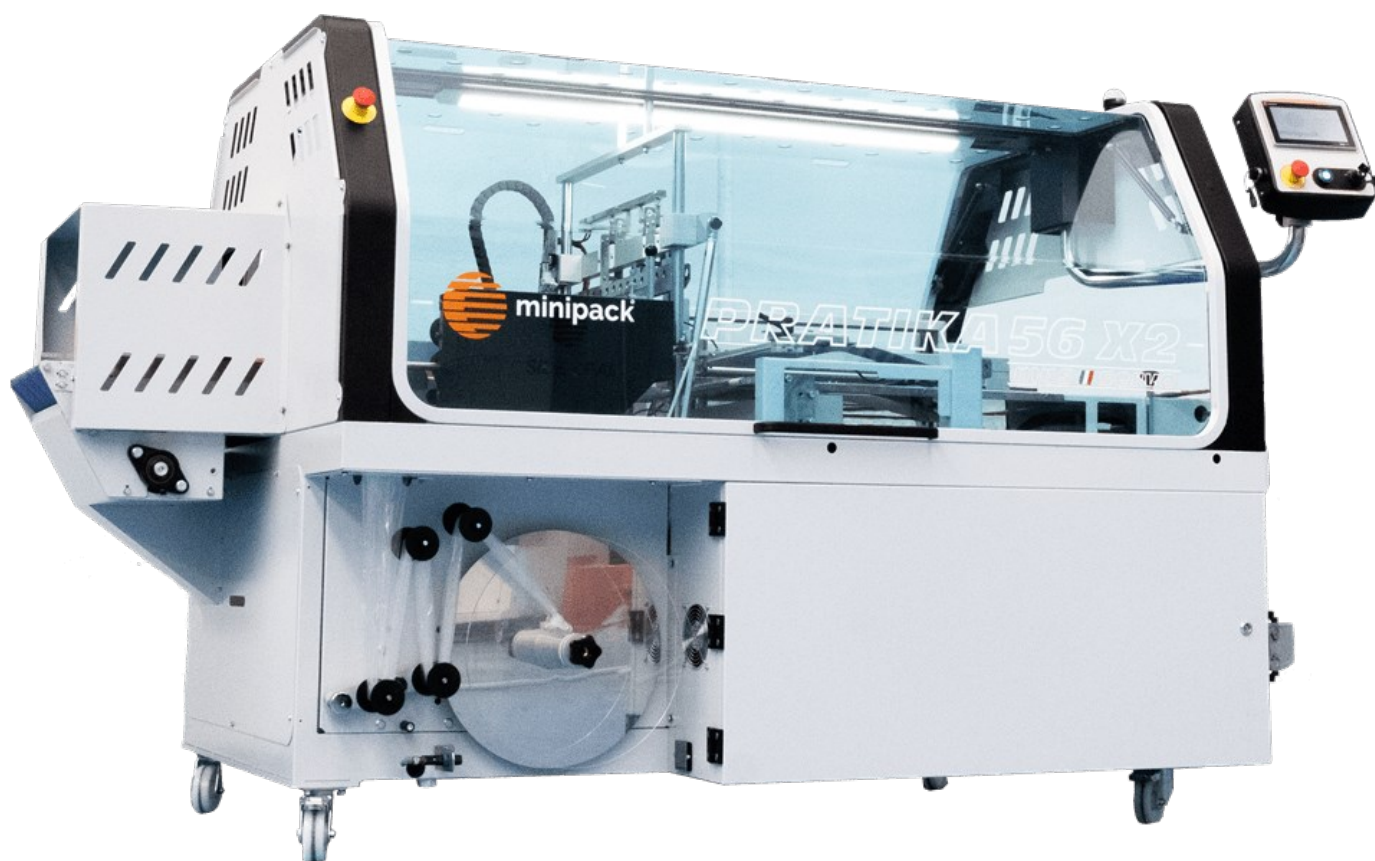

## DESCRIPTION

The new **PRATIKA 56 MPS X2** is a **servo-assisted** automatic **shrink wrapping machine**, equipped as standard with the **Side Seal** device, **continuous sealing** with no length limits, as well as **Center**

**minipack®-torre S.p.A.**

Sede legale - Via Provinciale, 54 - 24044 DALMINE (BG) Italy

P.IVA - C.F.: 01633550163 - Capitale sociale 619.200,00 i.v. - Reg. Imprese di Bergamo 01633550163 - REA n. 224151

**Sealing** and **fully electric** operation.

This machine, suitable for packaging formats up to **400 mm in width** and **240 mm in height**, has been enhanced in all **mechanical** and **electronic components** to achieve a production rate of up to **3600 pieces per hour** (depending on product dimensions and film used).

**PRATIKA 56 MPS X2** thus represents a perfect synthesis of **reliability, high performance, versatility**, and **safety**, further evolving the concept of **automatic shrink film packaging machines**.

The most appreciated model of the new range of **Minipack automatic packaging machines**:

- **Continuous sealing system.**
- **Impulse side seal blade**, allowing the temperature to go from **0°C to 200°C** in a few seconds, maintaining a constant temperature for **uniform side sealing**.
- **Easy and quick film positioning system** in the side seal.
- Materials and technical solutions chosen for **long-lasting use**.
- Access to all parts of the machine for **easy maintenance**.
- **Brushless servomotor**, allowing constant pressure on the **sealing bar** for consistent sealing.
- **Control logic managed by PLC.**
- The machine offers remarkable versatility and convenience, allowing the operator to work easily from both sides thanks to the **movable PLC**, the presence of a **double door**, and a **rear drawer** that facilitates effortless coil change.
- **Fully electric**, with no need for compressed air, ensuring **reduced energy consumption**.
- **Adjustable and electronic Center Sealing device.**
- **CE standard compliance.**

## TECHNICAL FEATURES

Electrical supply	230V 1Ph
Maximum installed power	2,5kW
Maximum current	11 A
Hourly production	3600 p/h
Maximum product dimensions (width)	400 mm
Maximum product dimensions (height)	240 mm
Maximum product dimensions (length)	∞

**minipack®-torre S.p.A.**

Sede legale - Via Provinciale, 54 - 24044 DALMINE (BG) Italy

P.IVA - C.F.: 01633550163 - Capitale sociale 619.200,00 i.v. - Reg. Imprese di Bergamo 01633550163 - REA n. 224151




**minipack®**  
THE ORIGINAL PIONEER

Maximum coil dimensions (Ø x length)	350x700mm
Infeed tape height	870 mm (with wheels) 830-910 mm (with feet)
Machine dimensions (guards open)	2893x1340x1558 mm
Machine dimensions (guards closed)	2893x1820x1980 mm
Machine packaging dimensions	2970x1650x2000 mm
Machine color	RAL7035 textured

minipack®-torre shall not be held liable for typos or printing errors in this catalogue. It also reserves the right to make changes to the specified features without prior notice. All trademarks are property of their respective owners and are hereby acknowledged.

## TECHNICAL DRAWING

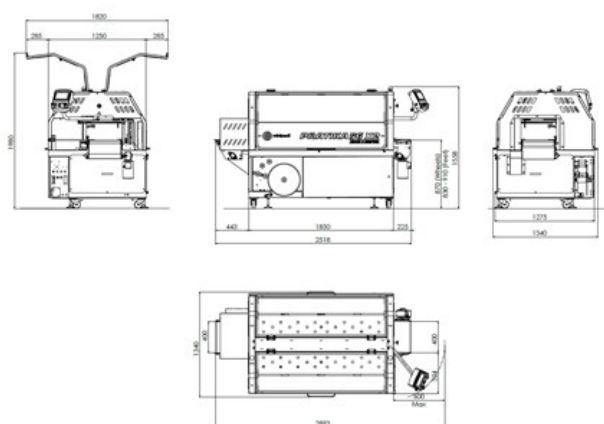

**minipack®-torre S.p.A.**

Sede legale - Via Provinciale, 54 - 24044 DALMINE (BG) Italy

P.IVA - C.F.: 01633550163 - Capitale sociale 619.200,00 i.v. - Reg. Imprese di Bergamo 01633550163 - REA n. 224151