



minipack®
THE ORIGINAL PIONEER

MVS52 X

TROLLEY VACUUM - SEALING BARS 530 MM



DESCRIPTION

MVS X is a line of cutting-edge **vacuum packaging machines**, equipped with high quality technological content and innovative features. At the same time, the range maintains the utmost ease of use that has always characterized the company's products. All models of the series have been designed and created by following the advice of chefs and professionals in the food industry, thanks to which it has been possible to implement a rich series of specific features, cut out on the needs of professional use.

A brief synthesis of the most innovative functions of these **chamber vacuum sealers** includes:

- Membran Switch keypad with tactile controls, applied hermetically to the front in order to prevent infiltration of liquids
- Control Panel with 10 different packaging programs, customized to the needs of the food industry

minipack®-torre S.p.A.

Sede legale - Via Provinciale, 54 - 24044 DALMINE (BG) Italy

P.IVA - C.F.: 01633550163 - Capitale sociale 619.200,00 i.v. - Reg. Imprese di Bergamo 01633550163 - REA n. 224151


- Specific alert of the need for oil change
- Reading of the vacuum degree obtained inside the chamber
- Calibration the packaging machine on variations of atmospheric pressure at different altitudes

TECHNICAL FEATURES

Electrical power supply	120V 60Hz 1Ph 208V 60Hz 3Ph
MAX power installed	2,0 kW (120V)
Maximum current	17 A (120V)
Dimensions of the sealing bars	530 mm (no. 2 side bars)
Packaging cycle (Vacuum 99.9%)	Vacuum = 22 s Air re-immission = 5 s
Vacuum pump	20 mc (1 Ph) 40 mc (3 Ph)
Work surface height	893 mm
Machine dimensions (lid open)	618x785x1277 mm
Machine dimensions (lid closed)	618x785x983 mm
Machine weight (Net/Gross)	130/155 kg (20m ³) 152/177 kg (40m ³)
Available chamber dimensions (Tank+lid)	399x519x200 mm

minipack®-torre shall not be held liable for typos or printing errors in this catalogue. It also reserves the right to make changes to the specified features without prior notice. All trademarks are property of their respective owners and are hereby acknowledged.

TECHNICAL DRAWING

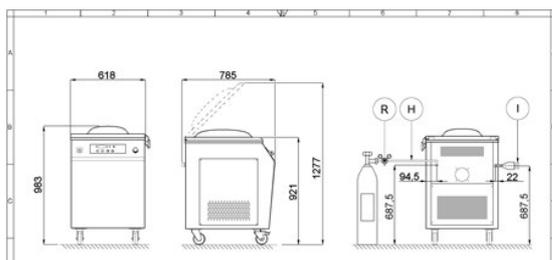


minipack®-torre S.p.A.

Sede legale - Via Provinciale, 54 - 24044 DALMINE (BG) Italy

P.IVA - C.F.: 01633550163 - Capitale sociale 619.200,00 i.v. - Reg. Imprese di Bergamo 01633550163 - REA n. 224151



minipack®
THE ORIGINAL PIONEER

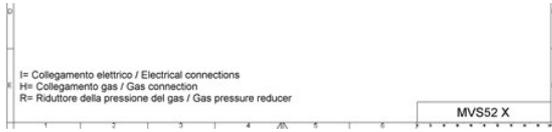

minipack®-torre S.p.A.

Sede legale - Via Provinciale, 54 - 24044 DALMINE (BG) Italy

P.IVA - C.F.: 01633550163 - Capitale sociale 619.200,00 i.v. - Reg. Imprese di Bergamo 01633550163 - REA n. 224151